

SMB-12HDM

Torque 0,11–1,36 N-m (1–12 IN.-LB.)

Hysteresis Tensioning Brakes
 Hysteresis-Zugbremsen
 Freni a Tensione Magnetica e Frizioni
 Freins de Tension Hysteresis
 Frenos de Tensión por Histéresis



Torque range	
Drehmomentbereich	0,11–1,36 N-m
Gamma di coppia	(1–12 IN.-LB.)
Intervalle de torsion	
Rango del par motor	

Heat dissipation	
Wärmeabfuhr	
Dissipazione massima del calore	25 Watt
Dissipation maximale de chaleur	
Disipación de calor máxima	


Max. RPM @ Min. Torque	1000 RPM
------------------------	----------

Max. RPM @ Max. Torque	175 RPM
------------------------	---------

Max. moment on shaft	
Biegemoment am schaft	
Momento di flessione dell'asse	34,0 N-m
Moment de flexion sur l'axe	(300 IN.-LB.)
Momento de flexión del eje	

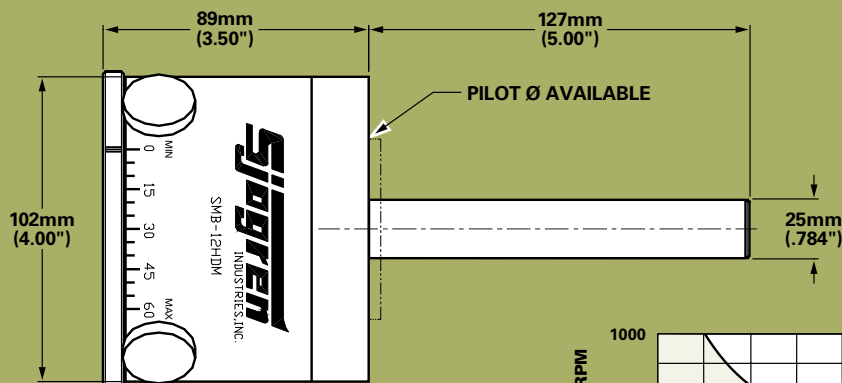

M8 x 1.25 THD., –19mm (.75") DEEP
 4 HOLES EQUALLY SPACED
 ON Ø90mm (3.543") B. C.

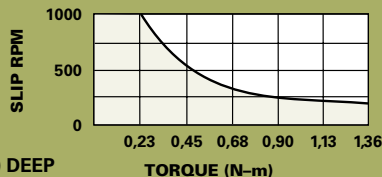

Shaded area under curve indicates safe heat dissipation operation of brake.

