

Torque 0,22–1,36 N-m (2–12 IN.-LB.)

Hysteresis Tensioning Brakes
Hysteresis-Zugbremsen
Freni a Tensione Magnetica e Frizioni
Freins de Tension Hysteresis
Frenos de Tensión por Histéresis




Torque range	
Drehmomentbereich	0,22–1,36 N-m
Gamma di coppia	(2–12 IN.-LB.)
Intervalle de torsion	
Rango del par motor	

Heat dissipation	
Wärmeabfuhr	
Dissipazione massima del calore	25 Watt
Dissipation maximale de chaleur	
Disipación de calor máxima	


Max. RPM @ Min. Torque	1000 RPM
------------------------	----------

Max. RPM @ Max. Torque	175 RPM
------------------------	---------



Max. moment on shaft	
Biegemoment am schaft	
Momento di flessione dell'asse	68,0 N-m
Moment de flexion sur l'axe	(600 IN.-LB.)
Momento de flexión del eje	

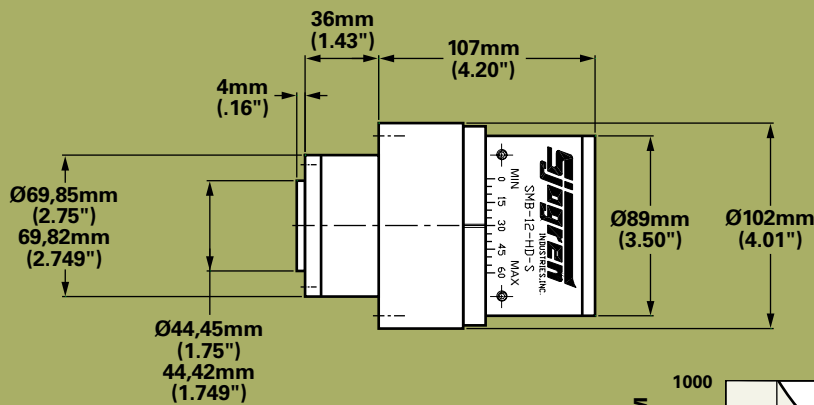

M6 x 1 THD.
4 HOLES EQUALLY SPACED
ON Ø60,32mm (2.37") B.C.



M6 x 1 THD.-12,7mm (.50") DEEP
4 HOLES EQUALLY SPACED
ON Ø88,9mm (3.50") B.C.

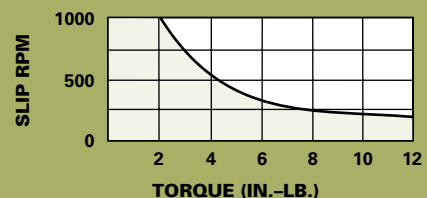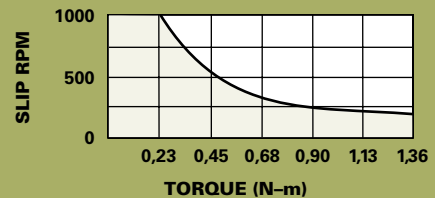

Shaded area under curve indicates safe heat dissipation operation of brake.