

Assembly


Hammerlock Coupling

Hammerlock-Kupplung

Accoppiamento hammerlock

Maille de jonction démontable

Enganche de cierre hammerlock

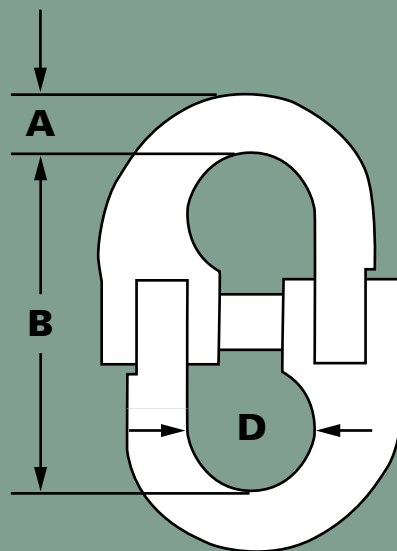

Size	Max. Pull	A	B	C	kg
6,3 (.250")	1360,8 kg (3,000 lbs.)	7,9 (.312")	46,0 (1.812")	12,7 (.500")	0,1 (.25 lbs.)
9,5 (.375")	2721,6 kg (6,000 lbs.)	11,1 (.437")	71,4 (2.812")	20,6 (.812")	0,2 (.50 lbs.)
12,7 (.500")	4536,0 kg (10,000 lbs.)	15,9 (.625")	85,7 (3.375")	31,8 (1.25")	0,6 (1.25 lbs.)
15,8 (.625")	6804,0 kg (15,000 lbs.)	19,1 (.750")	103,2 (4.062")	38,1 (1.50")	1,0 (2.25 lbs.)
19,1 (.750")	11340,0 kg (25,000 lbs.)	22,2 (.875")	122,2 (4.812")	46,0 (1.812")	1,6 (3.5 lbs.)
22,2 (.875")	13608,0 kg (30,000 lbs.)	25,4 (1.00")	138,0 (5.437")	53,9 (2.125")	2,7 (6 lbs.)
25,4 (1.00")	18144,0 kg (40,000 lbs.)	31,8 (1.25")	146,1 (5.75")	55,5 (2.187")	3,9 (8.5 lbs.)
31,8 (1.25")	27216,0 kg (60,000 lbs.)	38,1 (1.50")	182,5 (7.187")	71,4 (2.812")	7,0 (15.5 lbs.)